



MACHINE CONSTRUCTION
AGRICULTURE IRRIGATION EARTH MOVING



MACHINE CONSTRUCTION
AGRICULTURE IRRIGATION EARTH MOVING

EARTH MOVING

AP SCRAPERS



levellers



powerblades



tractor planes



attachment graders



scrapers



level dumpers




grading boxes



AP Machinebouw B.V. T 0031 527 618 246
Ambachtstraat 21 F 0031 527 698 760
8313 AV RUTTEN E info@apmb.nl
The Netherlands www.apmb.nl

DEALER

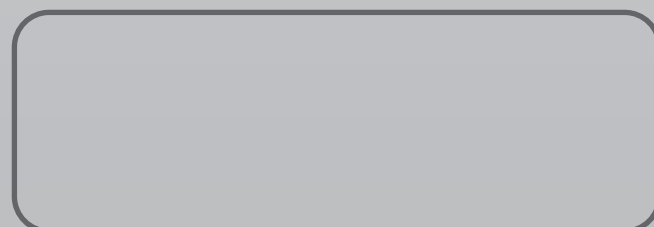

www.apmb.eu

General

AP scrapers are designed to make a proper grade and to transport a huge amount of material over distances. The transport and grading function can be combined. Efficient, cost-effective machines suitable for any type of levelling, earth moving, depositing, embedding and transportation.



Standard equipment scrapers APS

- Heavy-duty independent rotating and adjustable rims
- Rotatable heavy duty hitch with 50mm pin
- Hydraulic accumulator suspension
- Electrical system, road light, turn and stop light, 12V
- Diagonal yellow/orange safety striping at the back
- Self-sharpening, reversible Hardox 470 cutting blade
- Electrically controlled functions



Options scrapers APS

- Heavy steel push block at the back
- Air brake connector to tractor brake system
- Automatic grease system for all pivots and cylinders
- Coupling for second scraper
- Topcon GPS single system
- Topcon laser system
- GPS or laser platform
- Company colours

Technical specifications scrapers APS

	APS 12,5	APS 15	APS 20 single	APS 20 tandem	APS 25 single	APS 25 tandem
Capacity heaped m³	12,5	15	20	20	25	25
Capacity struck m³	8,5	10,5	12,7	12,7	15,8	15,8
Rated load net kg	22.000	27.000	31.500	31.500	45.000	45.000
Cutting width mm	2500	3000	3800	3800	4500	4500
Overall width mm	3000	3500	3800	3800	4500	4500
Overall length mm	7650	7650	8150	8150	8150	8150
Overall height mm	2600	2600	2600	2600	2600	2600
Weight empty kg	10.500	12.500	14.000	14.000	16.500	16.500
Max. weight loaded kg	32.500	39.500	45.500	45.500	61.500	61.500
(Un)loading type	Fixed knife pivot ejection		Ejector (push out)			
Min. drawbar tractor hp/kw	300 / 220	300 / 280	340 / 25	400 / 295	380 / 280	600 / 441
Max. operating weight tractor kg	22.000	25.000	27.500	27.500	30.000	30.000
Hydraulic power unit	1 DW min. 80 l	1 DW min. 80 l	2 DW min. 80 l	4 DW min. 80 l	4 DW min. 80 l	4 DW min. 80 l
Tires	20.5 R25 SR30 radial	235-25 XADN tl radial	235-25 XADN tl	235-25 XADN tl	235,5-25 XADN tl	235,5-25 XADN tl
• Weight distribution carried by tractor : 1/3 of machine weight • Hydraulic requirements : 1/2" quick connect, 2 functions, hydraulic control valves						

Technical specifications scrapers APC (carry- all)

Type	Blade width cm	Depth mm	Transport width mm	Necessary power hp	Capacity m³	Number of wheels
APC 6	2300	1500	2650	80 / 110	6,5	2
APC 7	2600	1750	3000	100 / 140	8	2
APC 9	2800	1750	3200	160 / 200	10	4



Standard equipment scrapers APC

- Removable Hardox knife
- Drawbar with K80 coupling
- Wheels 16.00 x 20
- Tail-lights

Options scrapers APC

- Laser control
- Single hydraulic mast with electric valve
- GPS or LPS
- Company colours