

100
ATLAS 1919 - 2019

ATLAS
SINCE 1919

**STABLE.
STRONG.
STEADY.**

-  20.2 - 21.5 t
-  105 kW (143 HP)
EU Stage V
-  10.1 m



**MATERIAL HANDLING
MACHINE 200MH**

WWW.ATLASGMBH.COM

ATLAS – CONSTRUCTION MACHINERY MANUFACTURER WITH TRADITION

From person to person

When Hinrich Weyhausen started selling construction and agricultural machinery in 1919, he discovered that the machines which his customers actually needed were not available. So he listened to them carefully and went about building the machines himself – exactly according to the requirements of the people who used his machines every day. He carried out pioneering work with a passion under the brand name of Atlas. His focus was always on the benefit of the machines. And nothing has changed for us in terms of this ideal today.



**Atlas will make you strong
with excellent products and
a comprehensive service.**



With highly motivated employees, a great deal of commitment and expertise ATLAS GmbH develops successful crane & excavator technologies. Numerous customers, engineers and experts all around the globe have made their contribution. The result is robust equipment to enable you to work more effectively and safely than ever before.

As our know-how grew, so too did our dealer and service network worldwide.

We can hence guarantee – in those days and today too – that we will always be on the spot when you need us.



Atlas manufactures a wide range of equipment for the construction, railroad, material handling and infrastructure industries. You will find more information on Atlas under www.atlasgmbh.com.

CONSTRUCTION



TRANSPORT



INFRASTRUCTURE



RECYCLING



CUSTOMER SATISFACTION IS OUR PRIORITY!

WE ARE COMMITTED

to providing our customers with highest quality products and services.

QUALITY STANDARDS AND CUSTOMER SATISFACTION

are measured in terms of service performance, reliability, relevance and timeliness.

OUR COMPANY'S MISSION, GOALS AND OBJECTIVES

are directed towards ongoing process improvement as a basis for strengthening our competitive position and for improving product quality and service standards.

QUALITY STANDARDS AND CUSTOMER SATISFACTION

are measured in terms of product performance and reliability.

PRODUCT RANGE

200MH *blue*





**EXTENSIVE DEALER NETWORK
EXCELLENT SERVICE
CUSTOMER FOCUSED**

TECHNICAL SPECIFICATION 200MH

ENGINE

Power rating.....105 kW (143 HP)	Bore / cylinder stroke 101 / 126	STANDARD BASIC EQUIPMENT:
RPM 1800/min	Cooling system Water-cooled	• Automatic idling system / Engine stop
Model..... Deutz TCD 6.1 L6 EU Stage V	Air filter..... Dry air filter	• Cold start assistance
Design..... Turbocharger / intercooler	Battery..... 2 x 12 V / 100 Ah	• Diesel pre-filter
Cylinder capacity 6057 cm ³	Generator 24 V / 100 A	• Engine monitoring
Number of cylinders 6	Starter..... 24 V / 4.8 kW	

HYDRAULIC SYSTEM

• AWE 5 system (Load sensing)	• Load-retaining and fine lowering valves in lifting circuit	• Operating modes: F1 (Fine)
• Load limit controlled high-performance pump	• Pipe break protection valves for lifting and articulated cylinders	F2 (Eco)
• Fuel-efficient flow-on-demand control	• Proportional grab and grab rotating function	F3 (Power)
• Sensitive, proportional, independent control	• 3 circuits for additional consumer loads possible	• Accumulator for emergency lowering of the arm system
• Primary and secondary protection against overload	• Max. oil flow..... 260 l/min	• Load-limit control
• Suction valves for all work functions	• Max. operating pressure 350 bar	• Cylinder end position damping

SWING ASSEMBLY

• Axial piston motor with priority valve	• Automatically controlled multi-disc brake	• Swing torque..... 49 kNm
• Planetary transmission	• Two, two-stage valves	• Max. swing speed. 8/min

TRACTION DRIVE AND BRAKES

• Variable displacement motor	• Automotive traveling and cruise control:	• Tractive force..... 92.7kN
• Power-shift transmission	• Max. speed 20 km/h	• Gradeability 55 %
• Double-acting brake valve	• Off-road speed 5 km/h	• Dual-circuit brake system Multi-disc
• Travel direction pre-selection via switch in joystick	• Crawling speed..... 1 km/h	• Parking brake Multi-disc

UNDERCARRIAGE

• Steering axle with automatic oscillating axle locking	• Heavy duty axles	• STD tires: Mitas 10.00-20 16PR EM23
• Additional axis locking via left joystick	• Toolbox in undercarriage	

TIRES

OPTIONAL:

• 4-road tyres 600/40 – 22.5 14PR Mitas	• 8-road tyres 10.00-20 16PR Nokia	• 8-road tyres 315/70 R22.5 Marked with a band, Grader type
• 4-road tyres 600/40 – 22.5 18PR Alliance	• 8-road tyres 10.00-20 16PR profile for asphalt use	• 8-road tyres 215/70 R22.5 Caliber Power Grip 23
• 4-road tyres 710/40 – 22.5 24PR Nokia	• 8-road tyres 10.00-20 Super elastic (up to 16 km/h)	

WORKING EQUIPMENT 200MH

DRIVER'S CAB

<ul style="list-style-type: none"> • Meets latest safety standards (ROPS) • Extra large entry zone • Spacious leg room • Radio preparation with mute function • Ready for electric cooling box • Different options for storage, compartment for documents • Heat-absorbing glass, tinted windows • Excellent all-way visibility • Bottle holder 	DRIVER'S SEAT: <ul style="list-style-type: none"> • Comfort seat with headrest • Arm rests and lumbar support • Seat adjustable separately from console • Air suspension • Heated • Horizontal and vertical suspension • Lumbar support 	MONITORING: <ul style="list-style-type: none"> • Operating data display screen • Automatic system for monitoring, warning and storage of data • Rear view security camera • Right side camera
	CONTROL: <ul style="list-style-type: none"> • Ergonomic joysticks with proportional slide control • Slim steering column, height and tilt adjustable • Indicators, controls and operating switches are clearly arranged • Swing axle lock in the left joystick 	CLIMATE CONTROL: <ul style="list-style-type: none"> • Automatic climate control • Excellent air distribution through optimally arranged nozzles • Refrigerant R134a
		SOUND LEVELS: <ul style="list-style-type: none"> • ISO 6396 (L_pA) in driver's cab 72 dB(A) • 2000/14 EG (L_wA) ambience level 97 dB(A)

ADDITIONAL EQUIPMENT

<ul style="list-style-type: none"> • Refueling pump • Beacon light • Gear protection • Cabin Sliding door • Cab protection guard • Cab elevation • Joystick steering • 270° camera system • LED working lights 	<ul style="list-style-type: none"> • Alarm-signal while driving • Engine speed adjustment via potentiometer • Auxiliary heating with water circuit • Automatic working brake • Switch hydraulic attachment kit, supports separately at front and rear • Hydraulic add-on kit, switch supports axially separately • Proportional control of supports by slide in joystick • Automatically controlled and monitored electric central lubrication system for uppercarriage and arm equipment 	<ul style="list-style-type: none"> • Premium Driver seat (Actimo Evolution) • Electric cooling box • Radio with USB • GPS/GSM telemetric system for monitoring of operating data, consumption, position • Biodegradable oil • Wide axles (overall width 2750 mm) • Support shield
		Other additional equipment: See price list Special options: upon request

FILL CAPACITIES

• Fuel tank301 litres	• Engine oil..... 15 litres	• Hydraulic system.....350 litres
• Cooling system.....38 litres	• Hydraulic tank 180 litres	• Ad Blue® 32 litres

OPERATING WEIGHTS


	MONOBLOCK BOOM 6.00 m (C6.6i)		ADJUSTABLE BOOM Base arm 1.87 m (C6.41) Boom 3.10 m (C6.46)
	Stick 4.00 m (D6.14i)	Stick 4.00 m (D6.14iS)	Stick 2.65 m (D6.3)
Support dozer blade			
SDB / outriggers	20.5 t / 21.3 t	20.7 t / 21.5 t	
4 support outriggers	20.8 t / 21.6 t	21 t / 21.8 t	

Operating weight incl. driver, fuel, lubricants and coolant plus 1.0 ton for attachments

	Bucket F415	Bucket F418	Trench digger G644
Capacity SAE	0.67 m ³	0.92 m ³	0.56 m ³
Cutting width	850 mm	1100 mm	2000 mm

WORKING RANGES 200MH


Loading boom 6.0 m (C6.6i) + Stick 4.0 m (D6.14i)

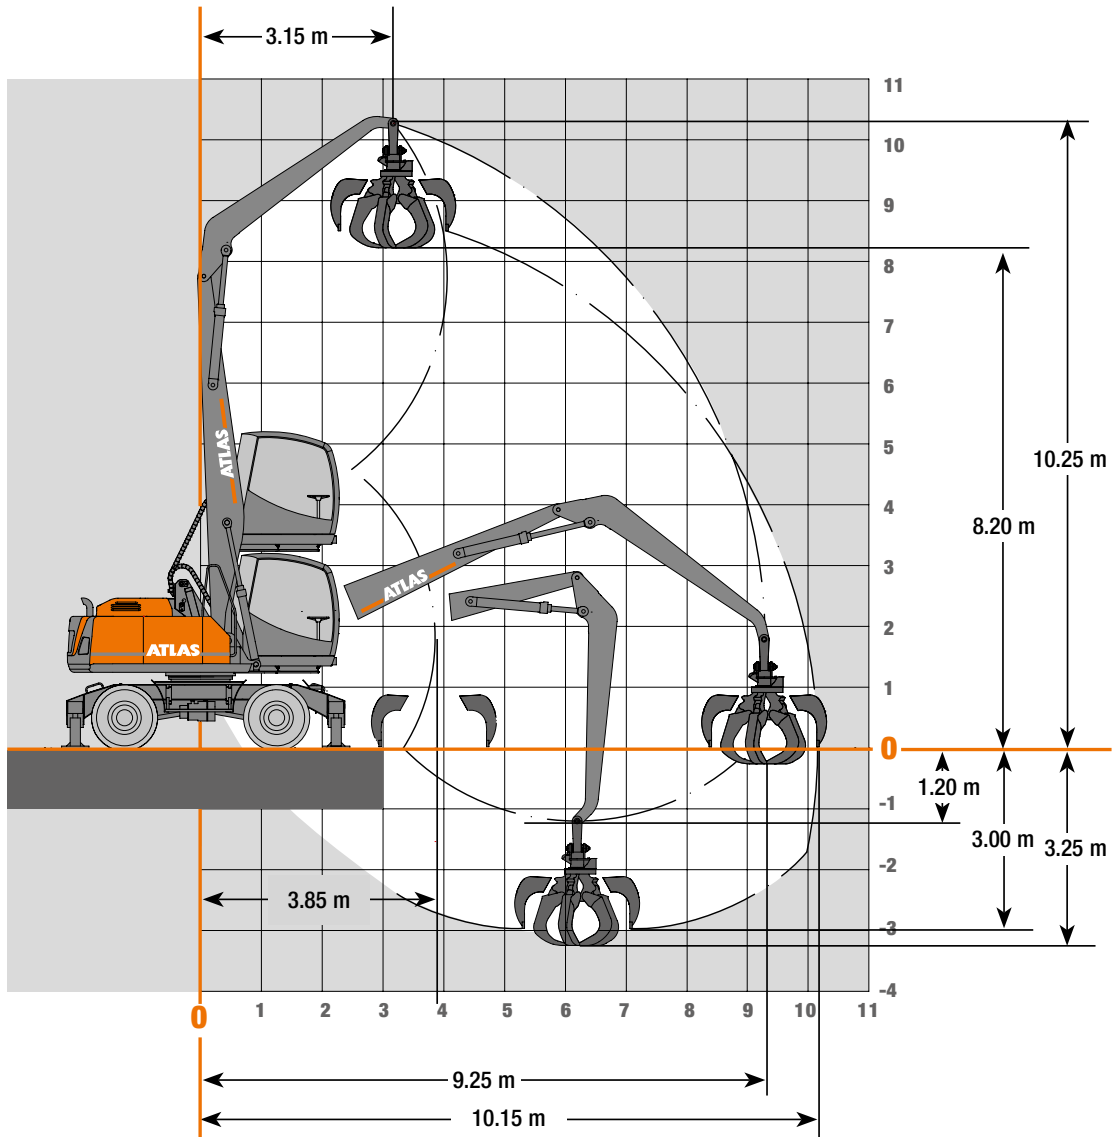

Attachments



Load hook



Log grab



Clamshell grab



Orange peel grab





















Load lifting magnet



Sorting grapple

LIFTING CAPACITIES 200MH

Lifting capacities: Loading boom 6.0 m (C6.6i) with Stick 4.0 m (D6.14i). Max. reach 10.15 m


HEIGHT	Undercarriage position		3.0 m	3.5 m	4.0 m	4.5 m	5.0 m	5.5 m	6.0 m	6.5 m	7.0 m	7.5 m	8.0 m	8.5 m	9.0 m	
+8.0 m	FRONT 	outriggers down			7353	6324	5827	5407	5044	4723						
		outriggers up			7353	6324	5827	5407	4815*	4246*						
	LATERAL 	outriggers down			7353	6324	5827	5407	5044	4723						
		outriggers up			6587*	5676*	4832*	4174*	3645*	3210*						
+7.0 m	FRONT 	outriggers down			7295	6360	5852	5421	5048	4717	4419	4141				
		outriggers up			7295	6360	5852	5421	4816*	4254*	3789*	3397*				
	LATERAL 	outriggers down			7295	6360	5852	5421	5048	4717	4419	4141				
		outriggers up			6585*	5661*	4821*	4168*	3646*	3218*	2861*	2557*				
+6.0 m	FRONT 	outriggers down			7173	6512	5966	5504	5105	4753	4438	4148	3874			
		outriggers up			7173	6512	5966	5454*	4773*	4223*	3769*	3387*	3061*			
	LATERAL 	outriggers down			7173	6512	5966	5504	5105	4753	4438	4148	3874			
		outriggers up			6623*	5579*	4755*	4115*	3605*	3188*	2841*	2547*	2294*			
+5.0 m	FRONT 	outriggers down	7539	8413	7516	6764	6150	5636	5196	4812	4471	4161	3871	3591		
		outriggers up	7539	8413	7516	6764	6150	5351*	4691*	4159*	3720*	3351*	3037*	2765*		
	LATERAL 	outriggers down	7539	8413	7516	6764	6150	5636	5196	4812	4471	4161	3871	3591		
		outriggers up	7539	7958*	6486*	5426*	4633*	4019*	3528*	3128*	2795*	2513*	2270*	2059*		
+4.0 m	FRONT 	outriggers down	9899	9084	7946	7065	6359	5778	5288	4866	4494	4160	3851	3558	3264	
		outriggers up	9899	9084	7946	7045*	6003*	5207*	4578*	4070*	3650*	3297*	2996*	2737*	2511*	
	LATERAL 	outriggers down	9899	9084	7946	7065	6359	5778	5288	4866	4494	4160	3851	3558	3264	
		outriggers up	9637*	7570*	6189*	5201*	4460*	3883*	3422*	3044*	2728*	2461*	2231*	2032*	1859*	
+3.0 m	FRONT 	outriggers down	11450	9620	8299	7297	6508	5867	5332	4875	4476	4118	3792	3482	3173	
		outriggers up	11450	9620	8057*	6748*	5781*	5037*	4446*	3966*	3568*	3232*	2947*	2701*	2486*	
	LATERAL 	outriggers down	11450	9620	8299	7297	6508	5867	5332	4875	4476	4118	3792	3482	3173	
		outriggers up	8818*	7035*	5815*	4928*	4254*	3724*	3297*	2945*	2650*	2399*	2185*	1998*	1834*	
+2.0 m	FRONT 	outriggers down	1339	5367	8292	7283	6477	5816	5264	4792	4378	4007	3665	3338	3011	
		outriggers up	1339	5367	7651*	6453*	5559*	4866*	4313*	3862*	3487*	3170*	2899*	2664*	2458*	
	LATERAL 	outriggers down	1339	5367	8292	7283	6477	5816	5264	4792	4378	4007	3665	3338	3011	
		outriggers up	1339	5367	5447*	4656*	4047*	3564*	3171*	2846*	2573*	2340*	2138*	1962*	1808*	
+1.0 m	FRONT 	outriggers down		3077	6471	6884	6167	5555	5027	4567	4157	3783	3433	3094	2746	
		outriggers up		3077	6471	6237*	5389*	4732*	4206*	3776*	3418*	3115*	2855*	2630*	2434*	
	LATERAL 	outriggers down		3077	6471	6884	6167	5555	5027	4567	4157	3783	3433	3094	2746	
		outriggers up		3077	5198*	4457*	3889*	3438*	3070*	2765*	2507*	2287*	2096*	1930*	1784*	
0.0 m	FRONT 	outriggers down		3313	5512	6043	5511	5015	4561	4147	3765	3405	3058	2710	2339	
		outriggers up		3313	5512	6043	5279*	4638*	4128*	3712*	3366*	3073*	2822*	2605*	2339	
	LATERAL 	outriggers down		3313	5512	6043	5511	5015	4561	4147	3765	3405	3058	2710	2339	
		outriggers up		3313	5069*	4339*	3786*	3350*	2997*	2704*	2457*	2246*	2064*	1906*	1768*	

The specified max. loading capacities in kilogrammes (kg) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values. *Value limited due to excavator stability.

All loading capacities are listed with 2.5 m undercarriage width. The undercarriage may be delivered with 2.75 m width as an option.

WORKING RANGES 200MH

Loading boom 6.0 m (C6.6i) + Stick 4.0 m (D6.14iS)

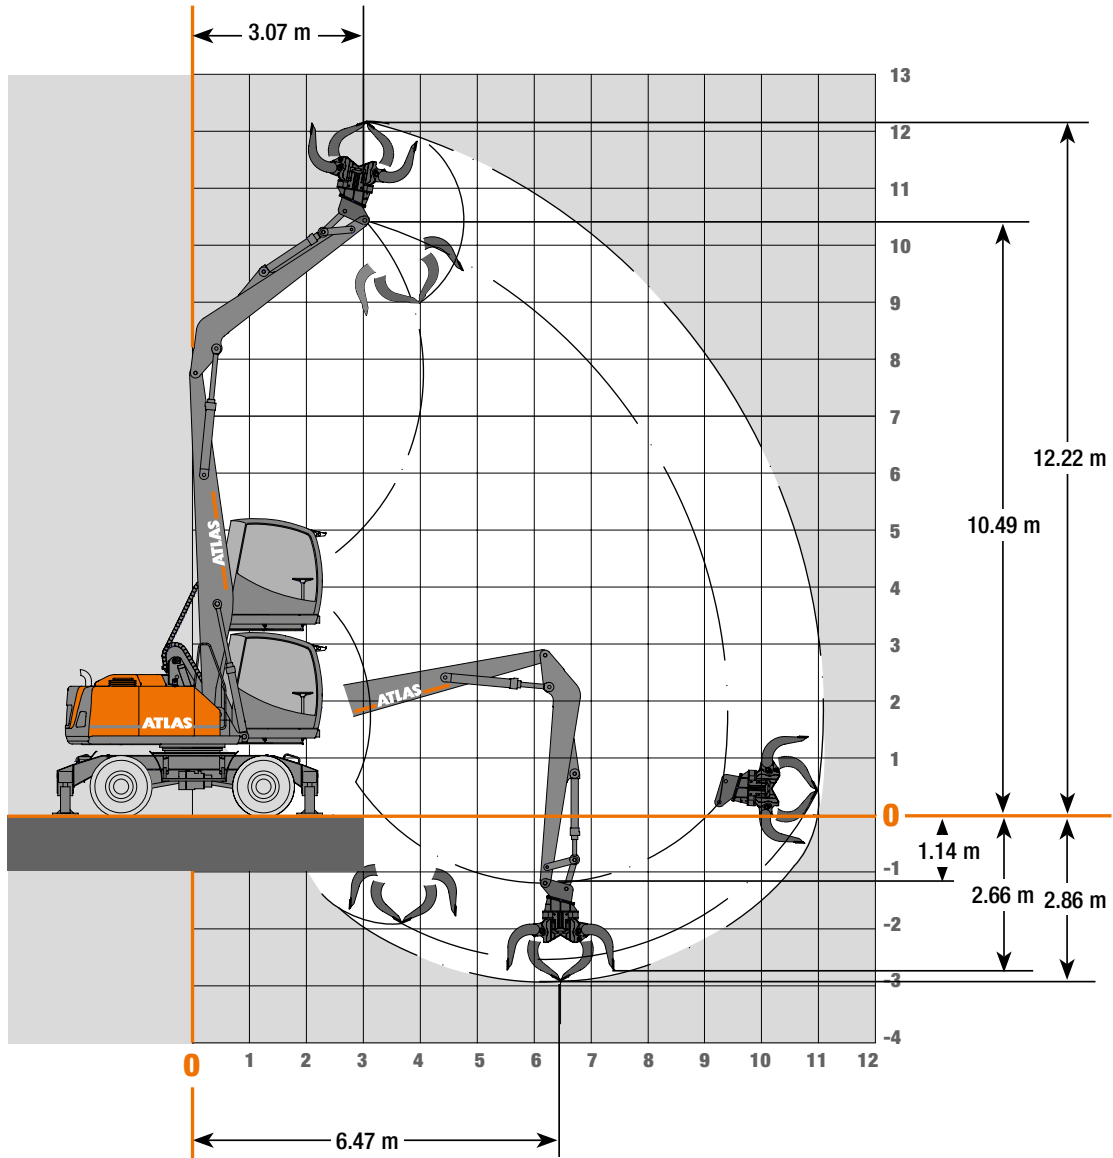


Attachments



Load hook



Log grab



Clamshell grab



Orange peel grab





















Load lifting magnet



Sorting grapple

LIFTING CAPACITIES 200MH

Lifting capacities: Loading boom 6.0 m (C6.6i) with Stick 4.0 m (D6.14iS) Max. reach 11.05 m


HEIGHT	Undercarriage position		3.0 m 3.5 m 4.0 m 4.5 m 5.0 m 5.5 m 6.0 m 6.5 m 7.0 m 7.5 m 8.0 m 8.5 m 9.0 m															
			3.0 m	3.5 m	4.0 m	4.5 m	5.0 m	5.5 m	6.0 m	6.5 m	7.0 m	7.5 m	8.0 m	8.5 m	9.0 m			
+8.0 m	FRONT 	outriggers down			7353	6324	5827	5407	5044	4723								
		outriggers up			7353	6324	5827	5407	4815*	4246*								
	LATERAL 	outriggers down			7353	6324	5827	5407	5044	4723								
		outriggers up			6587*	5676*	4832*	4174*	3645*	3211*								
+7.0 m	FRONT 	outriggers down			7295	6359	5851	5420	5047	4717	4418	4141						
		outriggers up			7295	6359	5851	5420	4815*	4254*	3789*	3397*						
	LATERAL 	outriggers down			7295	6359	5851	5420	5047	4717	4418	4141						
		outriggers up			6586*	5660*	4820*	4168*	3646*	3218*	2861*	2557*						
+6.0 m	FRONT 	outriggers down			7171	6510	5965	5503	5104	4753	4437	4147	3873					
		outriggers up			7171	6510	5965	5453*	4772*	4222*	3768*	3387*	3061*					
	LATERAL 	outriggers down			7171	6510	5965	5503	5104	4753	4437	4147	3873					
		outriggers up			6625*	5577*	4754*	4114*	3604*	3188*	2841*	2547*	2294*					
+5.0 m	FRONT 	outriggers down	8175	8460	7513	6762	6148	5634	5194	4811	4470	4160	3871	3591				
		outriggers up	8175	8460	7513	6762	6148	5349*	4690*	4158*	3719*	3350*	3036*	2764*				
	LATERAL 	outriggers down	8175	8460	7513	6762	6148	5634	5194	4811	4470	4160	3871	3591				
		outriggers up	8175	7961*	6483*	5424*	4631*	4017*	3527*	3127*	2794*	2512*	2270*	2059*				
+4.0 m	FRONT 	outriggers down	10614	9080	7943	7062	6357	5776	5287	4865	4493	4159	3850	3557	3263			
		outriggers up	10614	9080	7943	7042*	6001*	5205*	4577*	4069*	3649*	3296*	2995*	2736*	2511*			
	LATERAL 	outriggers down	10614	9080	7943	7062	6357	5776	5287	4865	4493	4159	3850	3557	3263			
		outriggers up	9632*	7566*	6186*	5199*	4458*	3882*	3420*	3042*	2727*	2460*	2230*	2032*	1858*			
+3.0 m	FRONT 	outriggers down	11445	9616	8295	7294	6505	5865	5330	4873	4474	4117	3791	3481	3172			
		outriggers up	11445	9616	8053*	6745*	5778*	5035*	4444*	3964*	3566*	3231*	2946*	2700*	2485*			
	LATERAL 	outriggers down	11445	9616	8295	7294	6505	5865	5330	4873	4474	4117	3791	3481	3172			
		outriggers up	8813*	7031*	5811*	4925*	4251*	3722*	3295*	2943*	2648*	2397*	2184*	1997*	1834*			
+2.0 m	FRONT 	outriggers down		6426	8289	7280	6474	5814	5262	4790	4377	4006	3664	3337	3010			
		outriggers up		6426	7647*	6450*	5556*	4864*	4311*	3860*	3486*	3169*	2898*	2663*	2458*			
	LATERAL 	outriggers down		6426	8289	7280	6474	5814	5262	4790	4377	4006	3664	3337	3010			
		outriggers up		6426	5443*	4653*	4045*	3561*	3169*	2845*	2571*	2338*	2137*	1961*	1807*			
+1.0 m	FRONT 	outriggers down		3662	7213	6881	6164	5552	5025	4565	4155	3781	3432	3093	2745			
		outriggers up		3662	7213	6234*	5386*	4729*	4204*	3774*	3416*	3113*	2854*	2629*	2433*			
	LATERAL 	outriggers down		3662	7213	6881	6164	5552	5025	4565	4155	3781	3432	3093	2745			
		outriggers up		3662	5194*	4454*	3886*	3435*	3068*	2763*	2506*	2285*	2095*	1929*	1783*			
0.0 m	FRONT 	outriggers down		3758	6011	6040	5508	5012	4559	4145	3763	3404	3057	2709	2338			
		outriggers up		3758	6011	6040	5276*	4636*	4126*	3710*	3364*	3071*	2821*	2604*	2338			
	LATERAL 	outriggers down		3758	6011	6040	5508	5012	4559	4145	3763	3404	3057	2709	2338			
		outriggers up		3758	5066*	4337*	3784*	3348*	2995*	2702*	2456*	2245*	2063*	1905*	1767*			

The specified max. loading capacities in kilogrammes (kg) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values. *Value limited due to excavator stability.

All loading capacities are listed with 2.5 m undercarriage width. The undercarriage may be delivered with 2.75 m width as an option.

WORKING RANGES 200MH


Adjustable Boom, Base Arm 1,87 m (C6.41), Boom 3,62 m (C6.461) + Stick 2,65 m (D6.3)

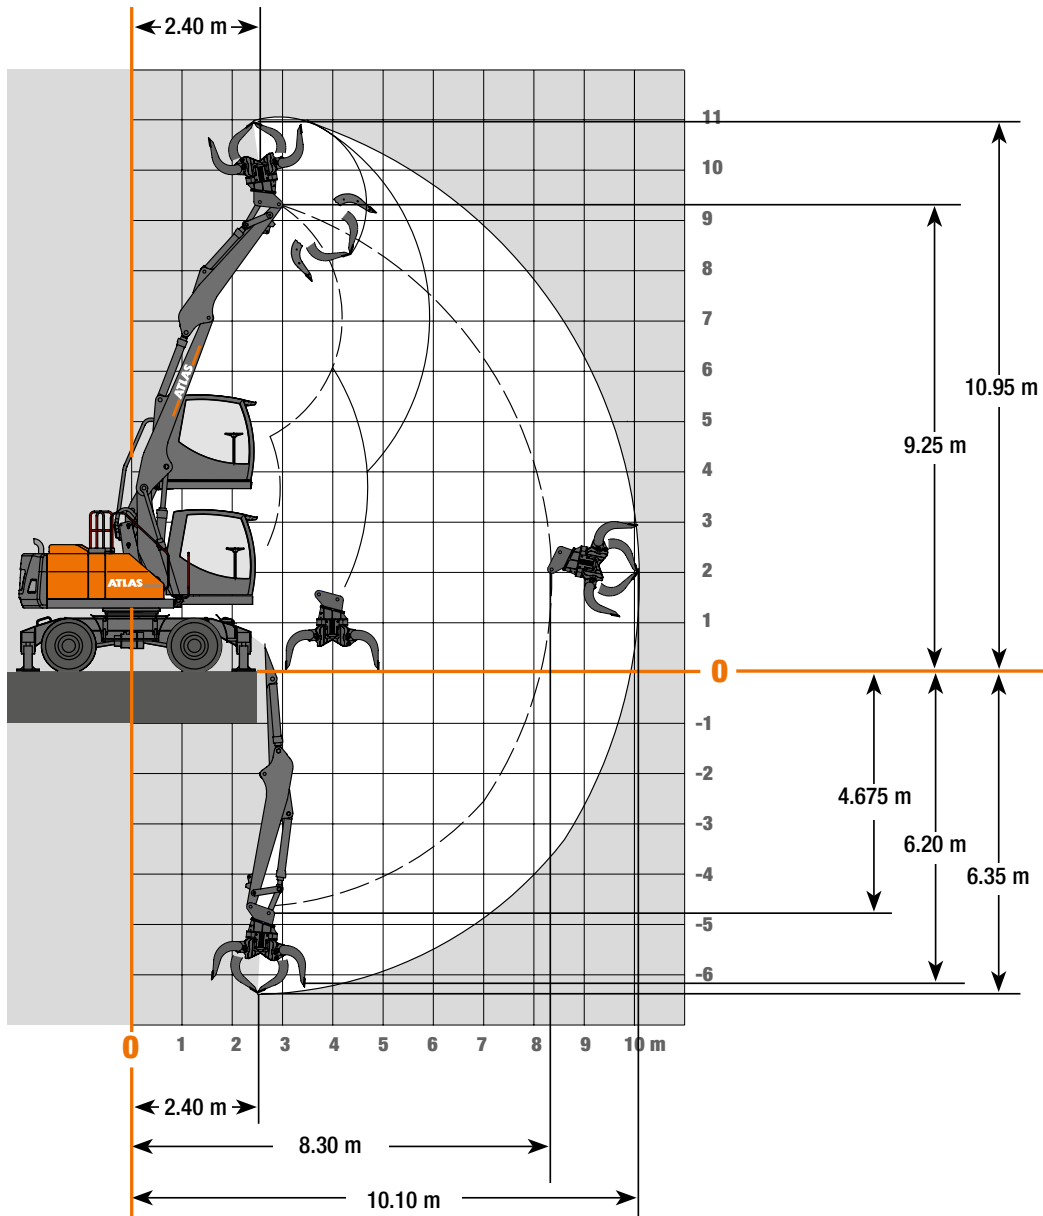


Attachments



Load hook



Log grab




Clamshell grab



Orange peel grab





















Load lifting magnet



Sorting grapple

LIFTING CAPACITIES 200MH

Adjustable Boom, Base Arm 1.87 m (C6.41), Boom 3.62 m (C6.461) + Stick 2.65 m (D6.3). Max. reach 9.73 m




HEIGHT	Undercarriage position		3.0 m	3.5 m	4.0 m	4.5 m	5.0 m	5.5 m	6.0 m	6.5 m	7.0 m	7.5 m	8.0 m
+ 5.0 m	FRONT 	outriggers down		4489	4522	4158	3867	3629	3432	3267	3129	3017	
		outriggers up		4489	4522	4158	3867	3629	3432	3267	3129	3017	
	LATERAL 	outriggers down		4489	4522	4158	3867	3629	3432	3267	3129	3017	
		outriggers up		4489	4522	4158	3867	3629	3393*	3040*	2732*	2392*	
+ 4.0 m	FRONT 	outriggers down	5688	5796	5083	4559	4158	3840	3581	3367	3186	3030	2778
		outriggers up	5688	5796	5083	4559	4158	3840	3581	3367	3186	3030	2778
	LATERAL 	outriggers down	5688	5796	5083	4559	4158	3840	3581	3367	3186	3030	2778
		outriggers up	5688	5796	5083	4559	4158	3754*	3342*	3002*	2720*	2421*	2124*
+ 3.0 m	FRONT 	outriggers down	5444	5772	5729	5016	4488	4081	3757	3491	3268	3074	2896
		outriggers up	5444	5772	5729	5016	4488	4081	3757	3491	3268	3070*	2813*
	LATERAL 	outriggers down	5444	5772	5729	5016	4488	4081	3757	3491	3268	3074	2896
		outriggers up	5444	5772	5541*	4754*	4150*	3671*	3286*	2966*	2700	2416*	2129*
+2.0 m	FRONT 	outriggers down	6557	6345	6032	5377	4761	4286	3907	3597	3335	3107	2894
		outriggers up	6557	6345	6032	5377	4761	4286	3907	3597	3322*	3048*	2793*
	LATERAL 	outriggers down	6557	6345	6032	5377	4761	4286	3907	3597	3335	3107	2894
		outriggers up	6557	6345	5407*	4649	4070*	3613*	3243*	2942	2696*	2383*	2109*
+1.0 m	FRONT 	outriggers down	7282	6913	6297	5511	4885	4386	3980	3642	3352	3102	2898
		outriggers up	7282	6913	6297	5511	4885	4386	3980	3611*	3303*	3048	2758*
	LATERAL 	outriggers down	7282	6913	6297	5511	4885	4386	3980	3642	3352	3102	2898
		outriggers up	7282	6398	5360*	4606*	4035*	3591*	3231*	2945*	2644*	2332*	2072*
0.0 m	FRONT 	outriggers down	8270	7351	6311	5503	4878	4380	3973	3635	3353	3135	2781
		outriggers up	8270	7351	6311	5503	4878	4380	3970	3612*	3321	3021*	2724*
	LATERAL 	outriggers down	8270	7351	6311	5503	4878	4380	3973	3635	3353	3135	2781
		outriggers up	8004	6439*	5382*	4624*	4052*	3613*	3273*	2913*	2561*	2272*	2040*
-1.0 m	FRONT 	outriggers down	9035	7485	6374	5550	4915	4413	4008	3682	3423	3004	
		outriggers up	9035	7485	6374	5550	4915	4413	4006	3678	3307*	2972*	
	LATERAL 	outriggers down	9035	7485	6374	5550	4915	4413	4008	3682	3423	3004	
		outriggers up	8129*	6537*	5470*	4694*	4090*	3612*	3196*	2802*	2482*	2225*	
-2.0 m	FRONT 	outriggers down	9225	7630	6500	5662	5023	4550	4148	3690	3074		
		outriggers up	9225	7630	6500	5662	5023	4550	4101*	3633*	3074		
	LATERAL 	outriggers down	9225	7630	6500	5662	5023	4550	4148	3690	3074		
		outriggers up	8085*	6473*	5391*	4612*	4024*	3509*	3069*	2718*	2436*		
-3.0 m	FRONT 	outriggers down	9543	7928	6799	5918	5145	4420	3657	2678			
		outriggers up	9543	7928	6799	5918	5145	4420	3657	2678			
	LATERAL 	outriggers down	9543	7928	6799	5918	5145	4420	3657	2678			
		outriggers up	8090*	6468*	5386*	4559*	3910*	3407*	3011*	2678			

The specified max. loading capacities in kilogrammes (kg) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values. *Value limited due to excavator stability.

All loading capacities are listed with 2.5 m undercarriage width. The undercarriage may be delivered with 2.75 m width as an option.

DIMENSION 200MH

200MH Transport position

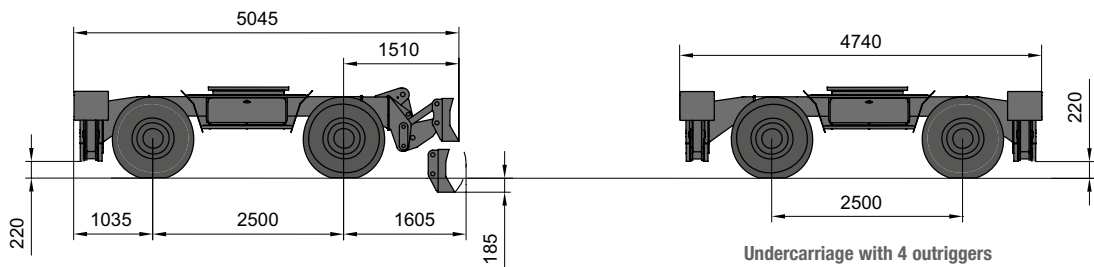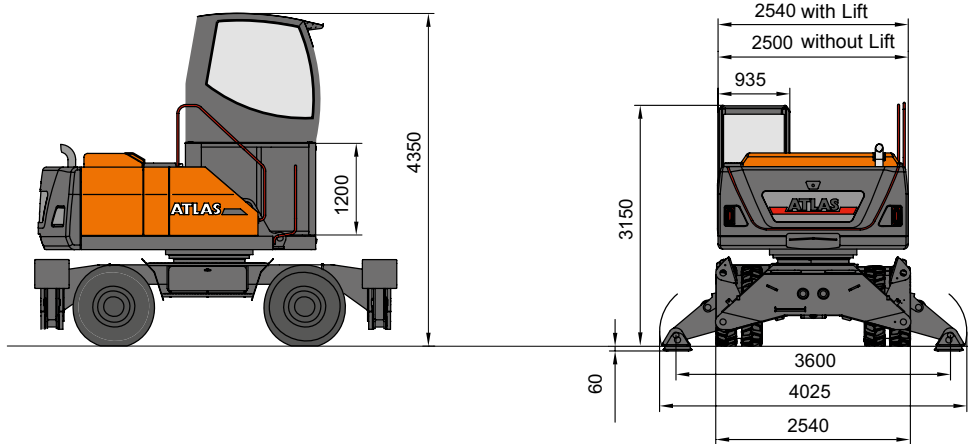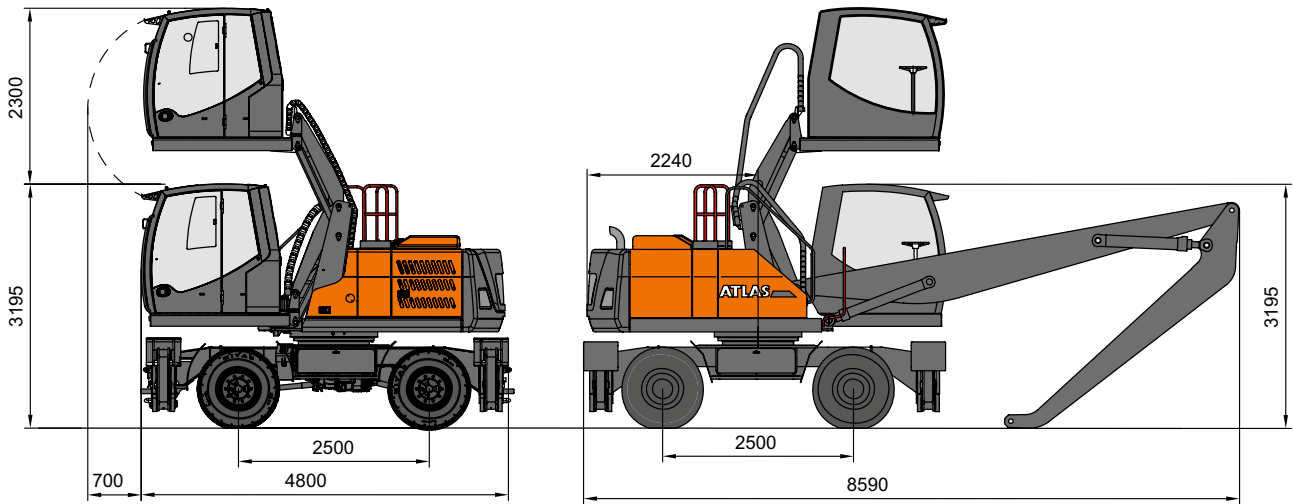

Undercarriage with 4 outriggers



200MH-EN(1) Effective date: 04/2016. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Atlas makes no other warranty, express or implied. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Atlas makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Atlas GmbH and/or its subsidiaries. All rights are reserved. Atlas® is a registered trademark of Atlas GmbH. Copyright © 2018 Atlas GmbH. Ref. no. 6192141

GANDERKESEE FACTORY

Atlas GmbH
Atlasstraße 6
D-27777 Ganderkesee,
Germany

Tel.: +49 (0) 4222 954 0
Fax: +49 (0) 4222 954 220
E-mail: info@atlasgmbh.com
www.atlasgmbh.com



VECHTA FACTORY

Atlas GmbH
Theodor-Heuss-Str. 3
D-49377 Vechta
Germany

T: +49 (0) 4441 954 0
F: +49 (0) 4441 954 299
E-mail: info@atlasgmbh.com
www.atlasgmbh.com



DELMENHORST FACTORY

Atlas GmbH
Stedinger Straße 324
D-27751 Delmenhorst
Germany

T: +49 (0) 4221 49 10
F: +49 (0) 4221 49 14 43
E-mail: info@atlasgmbh.com
www.atlasgmbh.com

ATLAS CRANES UK LTD NATIONAL SALES & SERVICE FACILITY

Wharfedale Road,
Euroway Trading Est.
Bradford, England BD4 6SL
United Kingdom

T: +44 8444 99 66 88
F: +44 1274 65 37 85
E-mail: atlasuk@atlasgmbh.com
www.atlas-cranes.co.uk
www.atlasgmbh.com



SINCE 1919
ATLAS

